

## Electrostatic Discharge Protection

### Sleek, Affordable Gigabit Network Interface Device (NID)



#### Affordable Protection

The cost-effective Mimosa gigabit Network Interface Device (NID) protects electrical systems from ESD (electrostatic discharge) surges. It's designed for exterior wall mounting, providing outdoor technician access, ESD protection and a grounding point for all radio installations. With a rugged IP54 rating, it has a dust and water-resistant design with a foam cable entry seal and a security fastener tie point.

#### Increased Reliability

Since Mimosa radios already have GDTs (Gas Discharge Tubes) for suppressing ESD, the Mimosa NID adds additional protection for electrical systems. This means higher reliability for WISP operators, and fewer service calls. It's also an ideal solution for areas that require installations to meet certain, local code requirements.

#### Easy Installation


In just a few minutes, a NID can be mounted, installed and connected. A shielded CAT 6 or 6A Ethernet cable goes into the NID, and then another CAT 6 or 6A Ethernet cable goes inside the house, or to the bottom of a tower, into a PoE injector. A 14 AWG or larger wire goes from the NID and connects to a ground rod.

#### Main Benefits

- ESD protection between subscriber premise entry and the home
- ESD protection between radios and the power source
- Protects the power source and electrical equipment
- Service interface for easily accessible troubleshooting
- Cost-effective solution for every deployment

## Technical Specifications

- **Data Transfer Rate:** Gigabit rated
- **Connectors:** Two (2) RJ-45
- **Protection Mode:** Line-to-line and line-to-ground
- **Surge Arrestor:** GDT (Gas Discharge Tube)
- **Nominal Voltage:** 20 V @ 1 A
- **DC Sparkover:** 90 V @ 100 V/s
- **Impulse Sparkover:** 550 V @ 1000V/ $\mu$ s
- **Impulse Discharge Current:** 10 kA
- **Capacitance:** < 1.0 pF @ 1 MHz
- **Mounting:** Wall mount. Two (2) screw mounting points for secure access to flat surface with optional rear feed point for clean installations.
- **Dimensions:** 42 mm (1.6") x 131 mm (5.1") x 84 mm (3.3")
- **Weight:** 0.13 kg (4.8 oz)
- **Operating Temperature:** -40 to +55 C
- **Humidity:** 5 to 100% condensing
- **Environmental Protection:** IP54 (dust and water intrusion protection)

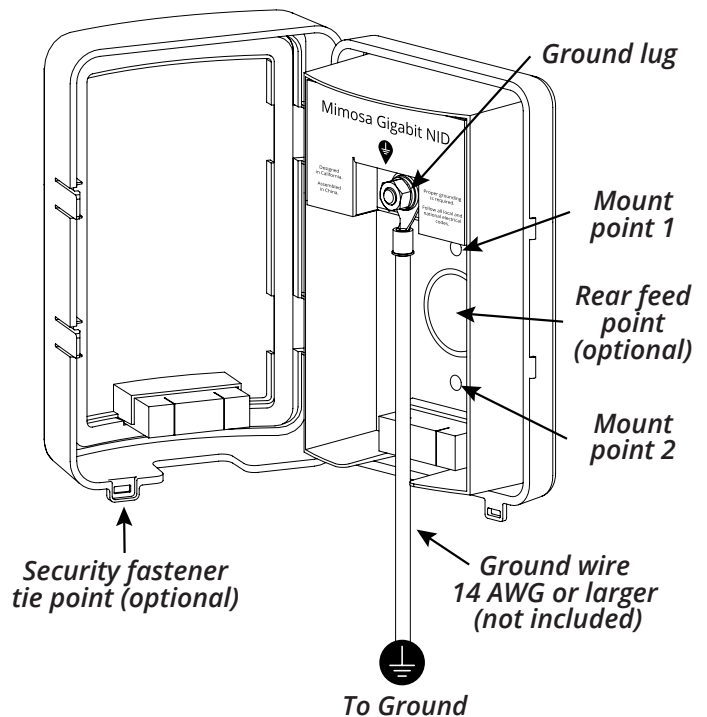

Mimosa Networks is the global technology leader in wireless broadband solutions, delivering fiber-fast connectivity to service providers and enterprise, industrial and government operators worldwide. Mimosa access, backhaul and client solutions are deployed in a hybrid-fiber-wireless architecture, and engineered for both point-to-point and point-to-multipoint connections. Mimosa's technology delivers unprecedented levels of cost-effective spectral efficiency. Founded in 2012 and headquartered in Silicon Valley, Mimosa is sold worldwide by members of Mimosa's partner program.